


Technical Datasheet

tasker® FROR5250 – 5x2,50 mm²

Power Cable 450/750 V.

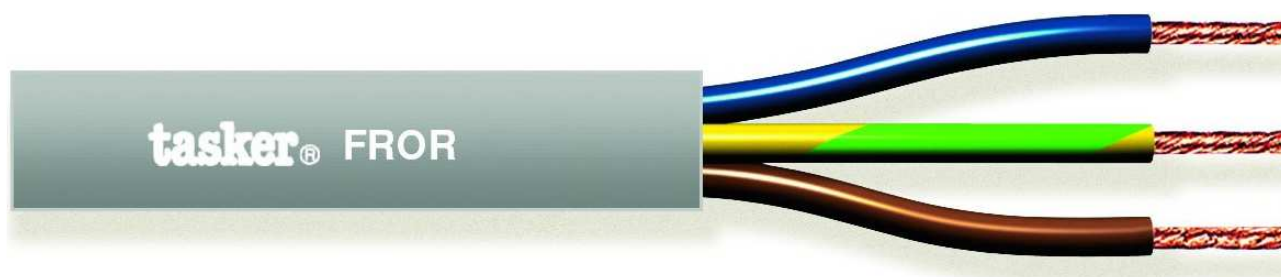

A

B

C

NOTE

CATEGORY

APPLICATIONS

The picture do not represent the real number of conductors

Power Cable (See Electronics Catalogue)

Energy and electrical installation.

- A:** Grey Flame Retardant **PVC** Sheath with reduced emission of corrosive Gases. Outer cable diam. Ø 14,30 (±0,20) mm.
- B:** Core Insulation with Flame Retardant **PVC** with reduced emission of corrosive Gases. Nom. Ø: 3,30 (±0,20) mm.
Color code: blue, brown, yellow/green, black, grey.
- C:** O.F.C. red copper formation with 0,25 mm elementary wires.
Nom. Cross section 5x2,50 mm².

MARKING

tasker® FROR 5250 5x2,50 Energy Cable - CEI 20-22/II IEMMEQU FROR 450/750V - 5x2,50 mm²

Cable Properties

Conductor Resistance	7,98 Ω/Km
Max Rated Voltage U₀/U	450/750 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio
Impiego	X	Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 16.05.16